

# HUBER RoWin Heat Exchanger




- Modular design
- Developed especially to be used with wastewater
- Not easily affected by coarse and floating material
- Odour-tight
- Low maintenance requirements
- Self-cleaning

## ➤ Design and function of the HUBER RoWin Heat Exchanger

The HUBER RoWin Heat Exchanger consists of a welded stainless steel construction in which horizontal pipe modules are arranged in parallel. The pipe modules are made of stainless steel to achieve maximum heat transfer efficiency. The cooling water streams through the individual pipes between the heat exchanger and heat pump. The screened wastewater flows through the heat exchanger tank and, via the pipe modules, gives off its thermal energy to the cooling water. Due to the specific chemical-biological properties of wastewater a biofilm is developed over time on the heat transfer surfaces that significantly impairs heat transfer. Preventive cleaning of the heat transfer surfaces therefore is applied to ensure the maximum heat transfer capacity is permanently maintained. Sediments and solids settling on the tank floor are removed by a screw conveyor and returned to the sewer along with the cooled wastewater.

The HUBER RoWin Heat Exchanger is available, as required, with an outer insulation for particularly exposed sites. Installed above ground, the system offers the benefits of easy maintenance and operation. Due to its modular design the HUBER RoWin Heat Exchanger can be tailored to suit specific site requirements. In combination with a heat pump up to several hundred kilowatts of thermal output can be generated, depending on the unit size.

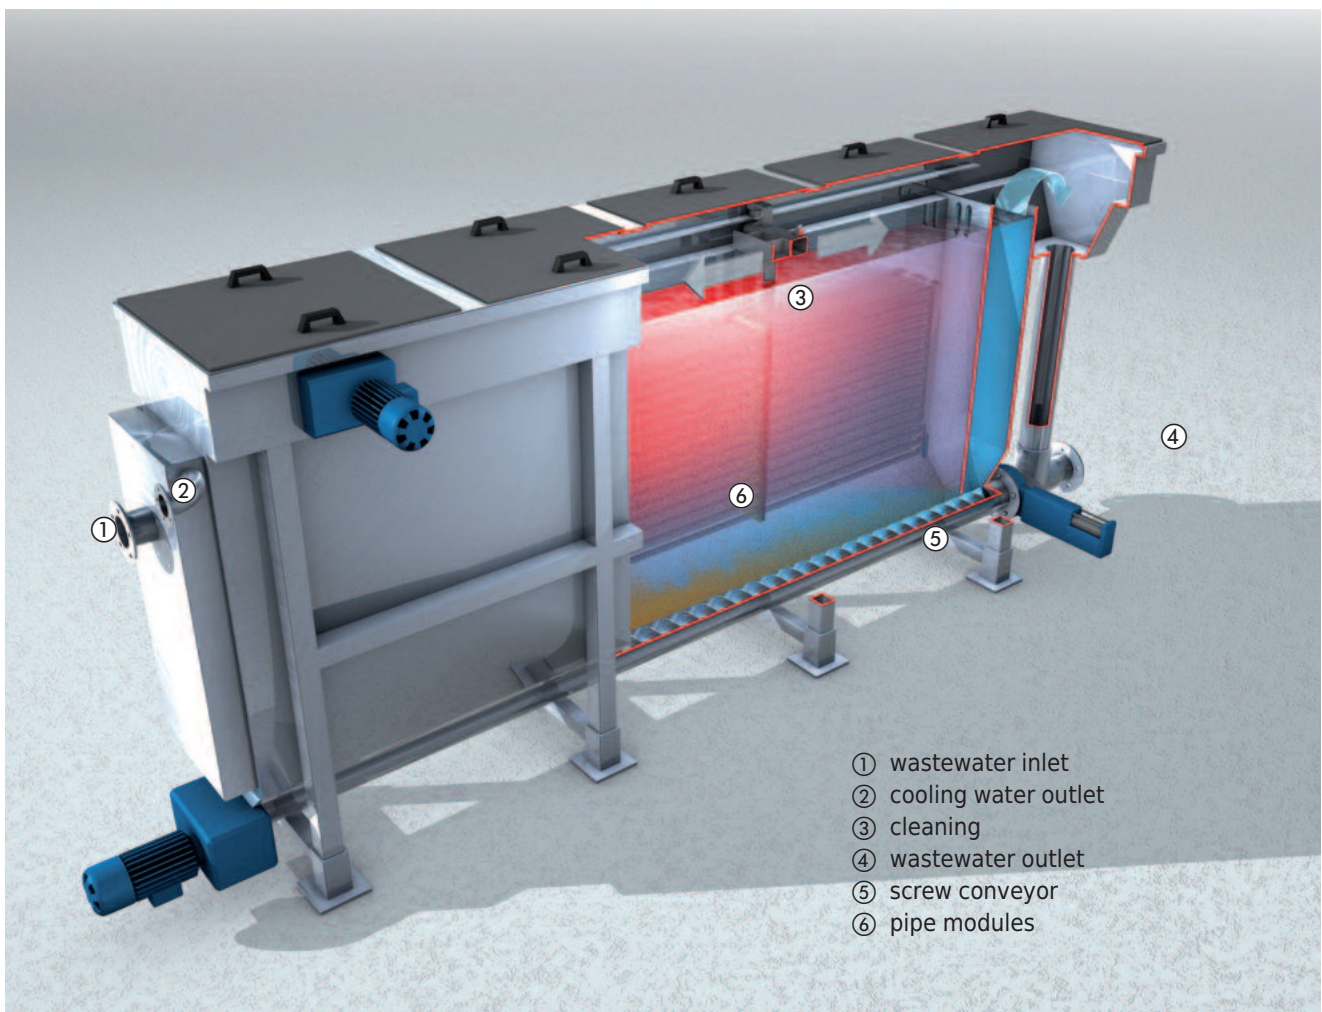


*Schematic drawing of a HUBER RoWin Heat Exchanger*

## ➤ Heat exchanger for concrete tank and channel installation: HUBER RoWinB

The HUBER RoWinB Heat Exchanger can be used for installation in the outlet of the wastewater treatment plant or in buffer tanks. Installed directly in the wastewater flow, the heat exchanger is fully surrounded by the flow. Due to the biological processes taking place, the temperature of effluents from sewage treatment plants is on average by 1 °C higher than the inlet temperature. Furthermore, higher amounts of thermal energy can be extracted from WWTP effluents than with heat recovery plants installed in sewer systems. The biological processes in the sewage treatment plant are not impaired and the introduction of the cool WWTP effluent outlet is beneficial for the flowing water biology. In addition, temperature and oxygen conditions in the waters are significantly improved. If installed in the channel, no additional pumps are required as the wastewater flow normally runs off by gravity. This avoids costs and significantly improves the economic efficiency of such plants. Due to its compact design and installation

in a channel or tank, no additional installation space is required and the available space utilised at an optimum. But biofilm growing on the heat exchanger surfaces cannot completely be ruled out with the use of the WWTP effluent. Integrated cleaning of the heat transfer surfaces therefore is of great importance to continuously maintain the maximum heat transfer capacity.

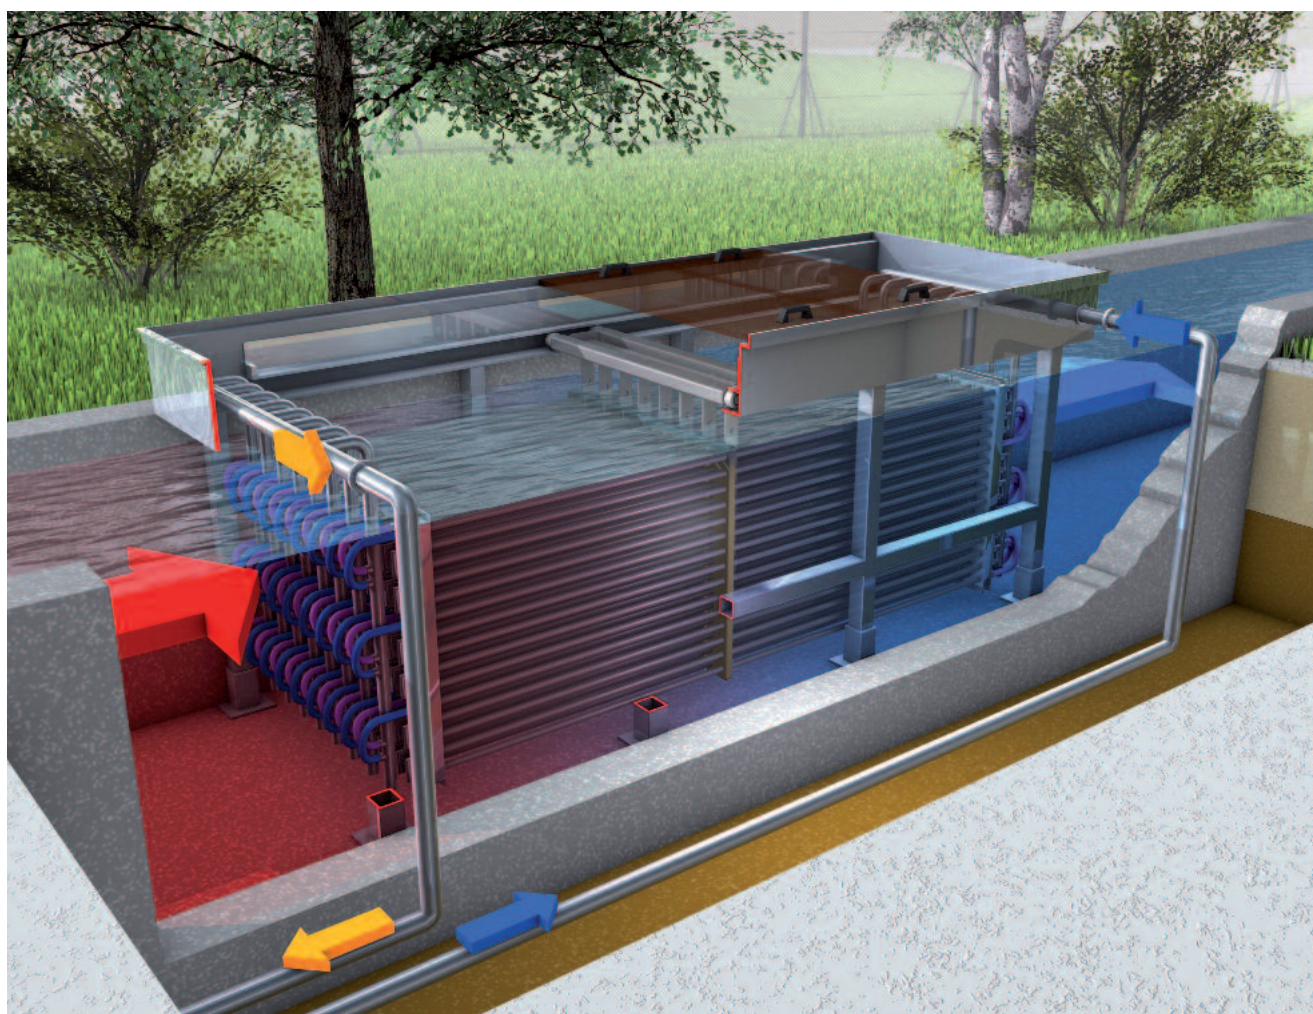

*HUBER RoWinB Heat Exchanger installed in the WWTP outlet*

## ►► Options of heat recovery from wastewater

### 1. Utilisation of raw wastewater from sewers by means of HUBER ThermWin®

- Installation near the consumer
- Independent of sewer dimensions and shape
- Continuously stable hydraulic conditions
- Possibility to control the entire plant at any time

### 2. Installation in the WWTP outlet

- No pre-screening required
- Constant volume flow
- High energy output
- Improved biological conditions in water courses
- Utilisation of recovered heat for sewage sludge drying


### 3. Filtrate from sewage sludge treatment

- High temperatures of approx. 30 °C
- Optional sewage sludge drying
- Very high energy potential
- All-year-round utilisation without interruption

### 4. Industrial plants

- Continuous flow of energy-rich production wastewaters
- High temperatures due to chemical-physical processes
- Supplier = consumer
- Compliance with sewer discharge standards

## ►► The benefits of HUBER Heat Exchangers

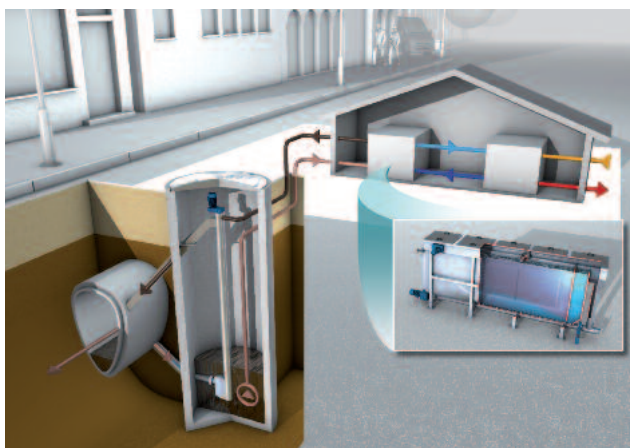

*Eco-friendly heat supply for buildings: HUBER ThermWin® with HUBER RoWin Heat Exchanger*

- Compact, enclosed tank design
- Continuous maximum heat transfer capacity
- Stable hydraulic conditions
- Fully automatic operation, minimum maintenance requirements
- Unsusceptible to grease, floating and coarse material
- Automatic removal of sediments
- Modular design for tailored solutions that meet the customer's specific requirements
- Various possible applications in both the municipal and industrial field

## HUBER SE

Industriepark Erasbach A1 · D-92334 Berching  
Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810  
info@huber.de · Internet: www.huber.de

Subject to technical modification  
0,0 / 3 - 6.2011 - 4.2004

HUBER RoWin Heat Exchanger