

►► Flood-Proof Exterior Door TT6

Completely made from stainless steel

Applicable as object or building protection especially in areas where flooding is likely.

Exterior door, flood-proof up to a water gauge of 2 m, opening to the outside (pressure side), ready for installation, double skinned, completely made from 1.4301/1.4307 stainless steel.

Door, 2 mm thick plate on the pressureless side, 4 mm thick plate on the pressure side. Door thickness: 58 mm, with injected CFCs-free polyurethane hard foam insulation. With circumferential square rubber seal. Fastened to the frame with stable maintenance-free hinges. Locking lever operable from both sides.

Frame, made of circumferential angle section, provided for bolted fixing, with associated fixing material and rubber seal between the frame and wall.

Frame and door shielded arc-welded and acid bath cleaned before washing, drying and surface passivation.



Ordering options:

Door opening options:

- Hinges on left
- Hinges on right

Special accessories available on request:

- Cylinder lock (operable from the pressure side only)
- 1.4571/1.4404 stainless steel

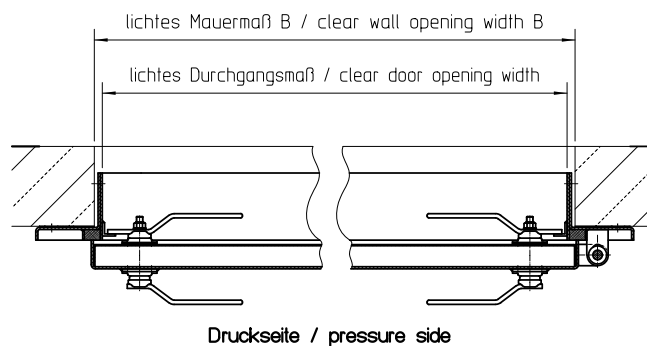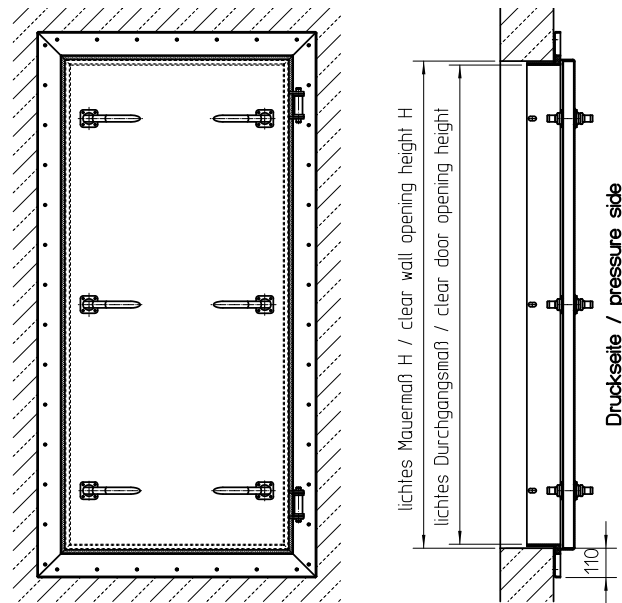

Nominal Size Order no.	Clear wall opening width B / height H (1)	Clear door opening width / height
0830/1630	830 / 1630	800 / 1600
0830/1830	830 / 1830	800 / 1800
1030/2030	1030 / 2030	1000 / 2000

Ask for further dimensions. All measurements in mm.

HUBER SE

Industriepark Erasbach A1 · D-92334 Berching
Phone: +49-8462-201-0 · Fax: +49-8462-201-810
info@huber.de · Internet: www.huber.de

Subject to technical modification
Drawing No. 190.167, 10.2014

Flood-Proof Exterior Door TT6